

## Spectralink 7722/7742 Handset

### Quick Start Guide



14226912-IG Ed. 5.0, Original document

Charge your handset for 14-16 hours prior to first use for best performance.

#### Turning Handset On

- Press left softkey to turn on handset.

#### Turning Handset Off

1. Press left softkey until the question 'Turn off?' appears in display.
2. Press **Yes** to confirm.

#### Adjusting Speaker/Headset Volume

- While on call, press the keys placed at the upper right side of the handset for volume control.

#### Adjusting Ringing Volume

1. Press **Menu** to enter main menu.
2. Scroll to **Settings**, and press **Select**.
3. Scroll to **Ringing volume**, and press **Select**.
4. Press the **left or right side of the navigation key** to adjust the volume of the ring tone.
5. Press **Set**.

#### Changing Ringing Tone

1. Press **Menu** to enter main menu.
2. Scroll to **Settings**, and press **Select**.
3. Scroll to **Ringing tone**, and press **Select**.
4. Scroll to the desired ring tone, and press the **right side of the navigation key** to listen to the ring tone.
5. Press the **left side of the navigation key** to listen to the internal calls ring tone.
6. Scroll to the desired ring tone, and press **Change** to select the new ring tone.

#### Off Hook Dialling (Dial Directly)

1. Press **\***.
2. Dial number.
3. Press **\*** to end the call.

#### On Hook Dialling (Pre-Dial)

1. Dial number.
2. Press **\***.
3. Press **\*** to end the call.

#### Speed Dial Calls

- Press and hold a key (0-9) for three seconds, until the call is initiated.

#### Answering and Ending Calls

- To answer or end a call, press **\***.

#### Call List Calls


1. Press the **left side of the navigation key** to enter **Call List**.
2. Scroll to the desired name or number, and press **\***.

#### Call Missed calls

1. Press the **right side of the navigation key** to enter **Missed Call List**.
2. Scroll to the desired name or number, and press **\***.

#### Phone Book Calls

1. Press the **bottom of the navigation key** to enter phonebook.
2. Scroll to the desired name and press **\*** to make a call.

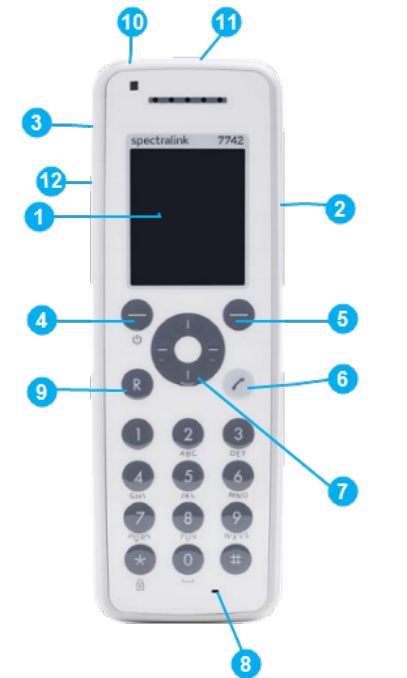

- 1 Display
- 2 Volume Control
- 3 Headset Connector
- 4 Left Softkey
- 5 Right Softkey
- 6 On/Off Hook
- 7 Four Way Navigation Key
- 8 Microphone
- 9 Call Transfer/Menu Exit
- 10 LED
- 11 Alarm button
- 12 Tear Off Cord (only 7742)

### Adding a New Contact to Phone Book

1. Press **Menu** to enter main menu.
2. Scroll to **Phone Book**, and press **Select**.
3. Scroll to **Add name/number**, and press **Select**.
4. Type the name of the contact using the keys 0-9.
5. Scroll to number, and enter the directory number/SIP extension of the contact (max. 24 digits/64 characters). Before entering a SIP URI, press and hold **#** until **SIP:** is shown.
6. Press **Save** to store name and directory number/SIP extension.

If the display shows **Memory full**, it is necessary to delete one or more contacts from phone book.

### Assigning Speed Dials

1. Press **Menu** to enter main menu.
2. Scroll to **Phone Book**, and press **Select**.
3. Scroll to **Speed dial**, and press **Select**.
4. Scroll to the desired speed dial, and press **Add name**.
5. Scroll to desired number, and press **Ok**.

### Locking/Unlocking Keypad

- Press left softkey followed by \* button to lock or unlock the keypad.

### Silent Mode On/Off

- Press **Menu**, followed by the **#** button to turn the handset silent mode on/off. In silent mode there is no sound for incoming calls and notifications.

### Exit Menus

- Exit menus and return to home screen, press **R**.

### Speakerphone On/Off

1. While on a call, press **Options**, scroll to **Spkr. on** to enable speakerphone.
2. To disable speakerphone, press **Options**, scroll to **Spkr. off** to disable speakerphone.

### Microphone Mute On/Off

1. While on a call, press **Mic Mute** to turn microphone mute on.
2. To turn microphone mute off, press **Mic on**.

### Technical Specifications

#### Capacity Spectralink 7722

- Active talking time (Economy mode) up to 19 hours.
- Standby time up to 119 hours.

#### Capacity Spectralink 7742

- Active talking time (Economy mode) up to 21 hours.
- Standby time up to 118 hours.












#### Capacity Spectralink 7742 with Bluetooth Turned on and Headset Connected

- Active talking time up to 13 hours.
- Standby time up to 117 hours.

#### Temperature

- Operating temperature: -10° - 55°C/14° - 131°F
- Charging temperature: 0° - 40°C/32° - 104°F

### Handset Icons

-  Missed calls
-  Incoming calls
-  Battery charging (in charger)
-  Battery charging (handset turned on in charger)
-  Battery capacity decreasing (handset out of charger)
-  Battery capacity low
-  Message received
-  Keypad or screen locked
-  Silent mode
-  Appears when loudspeaker is turned on
-  Microphone muted

© 2013 - 2018 Spectralink Corporation All rights reserved. Specifications subject to change without notice.

US Location  
+ 1 800-775-5330

Spectralink Corporation  
2560 55th Street  
Boulder, CO 80301  
USA

[info@spectralink.com](mailto:info@spectralink.com)

Denmark Location  
+45 75602850

Spectralink Europe ApS  
Bygholm Søpark 21 E Stuen  
8700 Horsens  
Denmark

[infoemea@spectralink.com](mailto:infoemea@spectralink.com)

[www.spectralink.com](http://www.spectralink.com)